


GPE036W-A Series

·36W Max.

SWITCHING MODE POWER SUPPLY

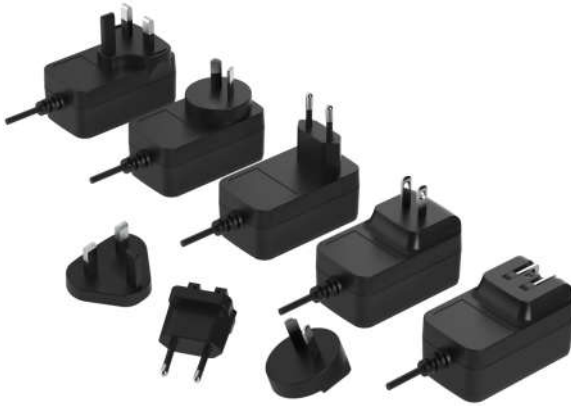

Features

- 100-240VAC Universal Input
- Protections:
Short circuit/Over voltage/Over current
- Energy Efficiency Level VI or CoC Tier II
- No Load Power Consumption \leq 0.1W(VI), \leq 0.075W(Tier II)
- MTBF>50,000 hours

GPE036W-Axxxxyy-z

xxx=090-240 表示输出电压为 9-24VDC, yyy=001-350 表示输出电流为 0.01-3.5A, Z: AC plug

MODEL NO	OUTPUT PORT	MAX.OUTPUT POWER(W)	OUTPUT VIKTAGE(Vo)	MIN. LOAD(lo)	MAX LOAD(lo)	LOAD REGULATI ON	LINE REGULATI ON	RIPPLE& NOISE
GPE036W-A	DC Plug	36W	9.0-12.9V	0A	0.01-3.5A	\pm 5%	\pm 1%	300mV
GPE036W-A	DC Plug	36W	13-17.9V	0A	0.01-2.76A	\pm 5%	\pm 1%	300mV
GPE036W-A	DC Plug	36W	18-24V	0A	0.01-2A	\pm 5%	\pm 1%	300mV

NOTE:

- 1: Ripple measurements shall be made with an oscilloscope of at least 20 MHz bandwidth.10uF electrolytic Output shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a capacitor to simulate system loading at temperature 25.
- 2:Line regulation is defined by changing \pm 10% of input voltage from nominal line at rated load.
- 3:Max.Power(W) \geq V_o \times I_o

Electrical Specification

INPUT

- Input Range 100 to 240 VAC
- Frequency 50 to 60Hz
- Input Current 0.9A
- Inrush Current 60A/100VAC 90A/230VAC
- Hold Up Time \geq 8ms
- Turn On Time \leq 3s

OUTPUT

- Short Circuit Protection Auto Recovery
- Over Voltage Protection Auto Recovery
- Over Current Protection Auto Recovery


ENVIRONMENT

- Operating Temperature 0 to 40°C
- Storage Temperature -25 to 70°C
- Operating Humidity 8% to 90%
- Storage Humidity 5% to 95%

SAFETY

- Certified for whole series:UL 62368-1,EN 62368-1,FCC,DOE,GEMS,ERP,EMC,SAA,RCM

Mechanical Specification

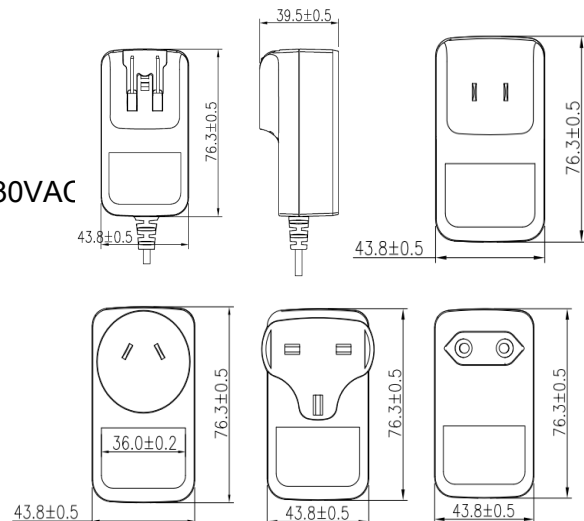

- Case Size:43.8L \times 76.3W \times 39.5H(mm)
- AC Plug:US EU UK AU CCC PSE
- Weight:150g