

MAIN FEATURES

- 230 V_{AC} Input
- Output current availability 350 mA to 1000 mA.
- Dims with leading and trailing edge dimmers
- Efficiency up to 82 %
- 90 °C Top case rated
- Compact Encapsulated Assembly
- Active Power Factor Correction
- UL and ENEC approved
- Long Life
- RoHS Compliant



DESCRIPTION


TROPO switch mode power supply technology is designed to generate one constant current output from an AC input, and work with industry standard lighting controls in dimming applications.

APPLICATIONS AND BENEFITS

TROPO is designed for powering LED luminaries with standard lighting controls. The modules operate with:

- Standard Light Switches
- Triac based Incandescent Dimmers (Standard phase – leading edge)
- Electronic Low Voltage Dimmers (Reverse Phase – trailing edge)

The following diagram depicts a typical installation utilizing the TROPO:

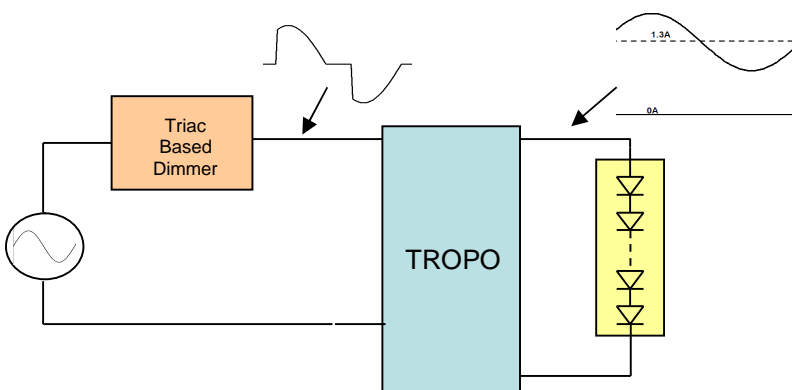

TROPO's Dimming Options:

- Dimming range down to less than 10% nominal output current
- Output current does not terminate during off time of dimmer
- Output Current up to 1000 mA
- Multiple Drivers / LED Assemblies may be connected to a single dimmer
- Facilitates compliance with Energy Star ratings for LED luminaries

MODEL CODING AND OUTPUT RATINGS

Model Number	Input Voltage [V _{AC}]	Output Voltage ¹ [V _{DC}]	Output Current [mA]	Output Power [W]	V _{OUT} No Load [V _{DC}]
RLDD015H-350H	230	12 ÷ 21	350	7.4	37
RLDD015H-350	230	24 ÷ 48	350	16.8	60
RLDD015H-700	230	16 ÷ 24	700	16.8	35
RLDD015H-1000	230	10 ÷ 16	1000	16	25

Table 1: Absolute Maximum Driver Ratings

¹ Total LED forward voltage must be within these ratings under all conditions including dimming.

INPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
AC Input Voltage		176	230	265	V _{AC}
Input Frequency		47	50/60	63	Hz
Input Current	230 V _{AC}	-	-	0.09	A
Inrush Current (peak)	230 V _{AC} Half Value time: 20 µs	-	-	2.5	A
Efficiency	Rated Load	78	-	82	%
Power Factor	230 V _{AC} Rated Load; PF is >0.8 for 230 V _{AC} Models with output power <10 W	0.9	-	-	

OUTPUT SPECIFICATIONS




Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Output Power Rating	check Model Coding and Output Ratings table	7.4	-	16.8	W
Output Voltage	check Model Coding and Output Ratings table	10	-	48	V
Output Current	check Model Coding and Output Ratings table	350	-	1000	mA
Ripple Current	I _{OUT_Pk-Pk} /RMS	-	-	40	%
Output Regulation		-	-	±5	% _{I_{OUT}}
Start-up time	With no dimmer connected	-	-	500	ms

PROTECTION FEATURES

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Output Short-Circuit	Hiccup, Auto recovery	-	-	-	-
Over-Temperature Top Case	Hiccup, Auto recovery	-	-	90	°C
No Load	Unit will not exceed "Vout No_Load" in Table 1	-	-	V _{No_Load}	V
Isolation Primary-to-Secondary	Reinforced/double Insulation meets IEC/EN61347-2-13 Class II				

LINE DIMMING

Current Dimming of the driver is possible with standard TRIAC based incandescent dimmers that chop the AC voltage, or with ELV dimmers. During the rapid rise time of the AC voltage when the dimmer turns on, the driver does not generate any voltage or current oscillations, and inrush current is controlled. During the on-time of the AC input, the driver regulates the output. The RMS value of the driver output current is proportional to the on-time of the AC input voltage. The RMS output current varies depending upon the conduction angle and RMS value of the applied AC input voltage.

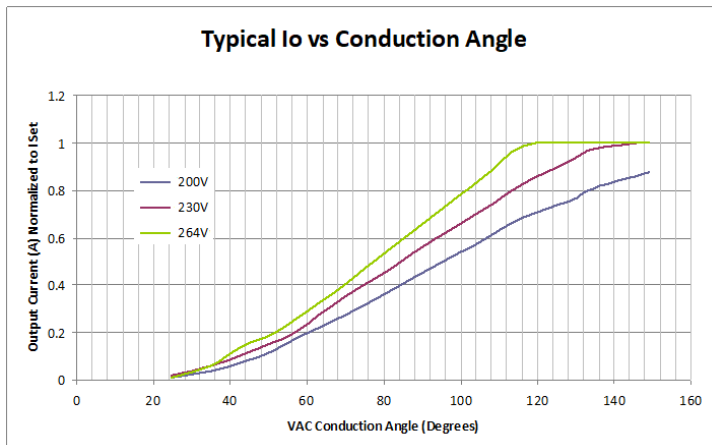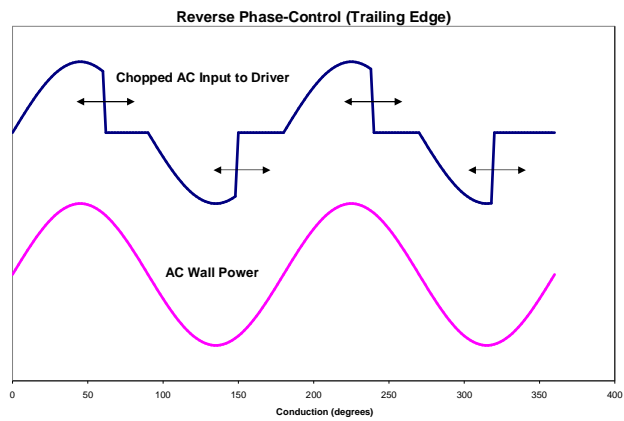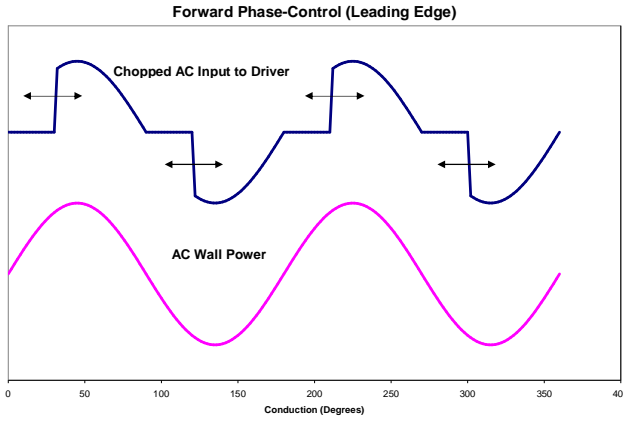

Output Control: Output Dims without any flicker.

Total dimming range is as follows:

Conduction Angle/output: 180 degrees/100 % max
30 degrees/10 % min

COMPATIBLE LINE DIMMERS




TROPO drivers are designed to operate with most standard dimmers. However, it has been performed extensive testing with the dimmers listed below. This list of dimmers does not imply any guarantee or warranty of compatibility with a particular application. The lack of dimmers on this list does not imply it is not compatible with TROPO drivers.

- COOPER, Aspire Series (Part Numbers 9530XXX)
- LEVITON, ILLUMITECH Series (Part Numbers IPI06-XXX)
- LEVITON, TRIMATRON Series (Part Numbers 6602-X, 6681-X, 6683-X, 6684-X, 700-X and 705-X)
- LEVITON, SURESLIDE Series (Part Numbers 6631)
- LEVITON, TRUE TOUCH Series (Part Number 6606-1LM)
- LUTRON, SKYLARK Series (Part Number S-600, S2-LH)

MECHANICAL DETAILS

Enclosure Material: Partially encapsulated with ABS plastic body enclosure
 I/O Connections: Flying leads, 18AWG, 152 mm long, 105 °C Rated, Stranded, Stripped by approximately 9.5 mm and tinned
 Mounting Details: Universal Mounting Clips and 6 mounting locations per package allow installer to choose the most suitable position for the mounting feet. 2x clips RHML000686-xx included (additional clips upon request).
 Ingress Protection: IP 20, UL damp rated

Weight: 145 g (5.1 oz)
 Dimensions: 82 x 56 x 29 mm (3.21 x 2.21 x 1.13 in)

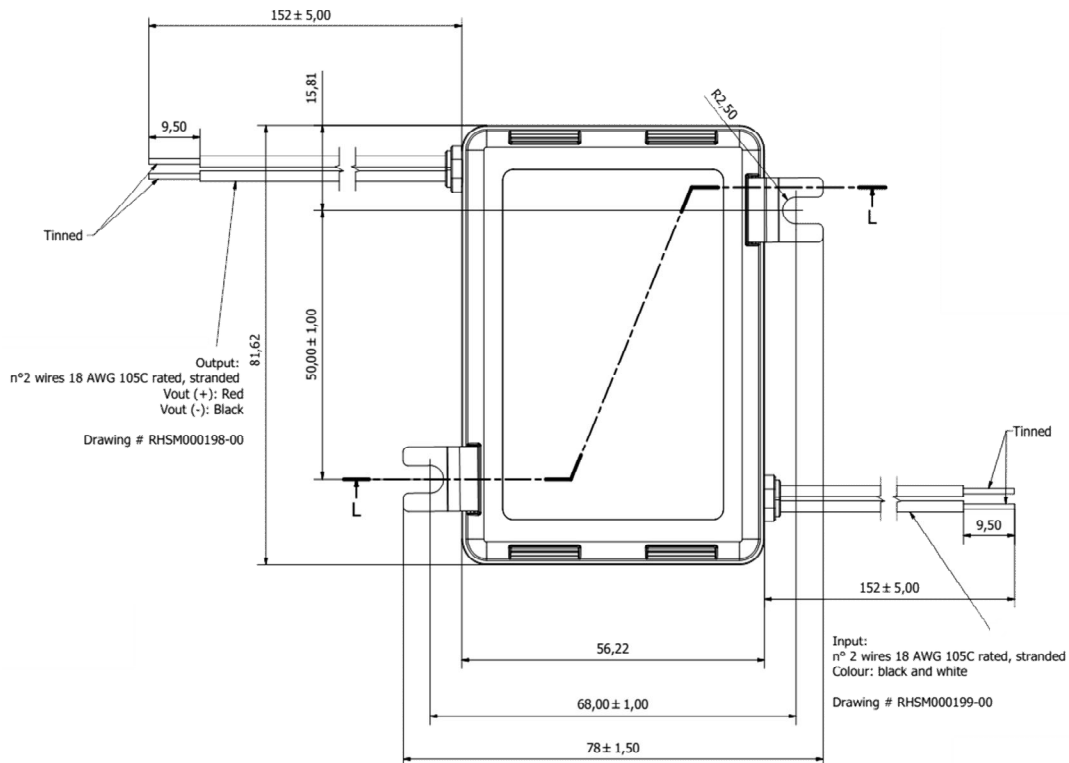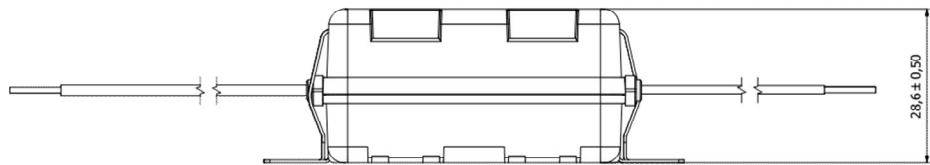

ENVIRONMENTAL SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nom	Max	Units
Top Case Temperature Range	Refer to the Top Case measurement point	-30	-	90	°C
Storage Temperature		-40	-	85	°C
Operating Relative Humidity	Non-condensing	5	-	95	%
Surface Temperature	Exposed surfaces temperature under all operating conditions	-	-	90	°C
Cooling	Convection cooled	-	-	-	
Shock EN 60068-2-27	Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration EN 60068-2-64	Operating: 5 – 500 Hz, 1gRMS (0.02 g ² /Hz), 3 axes, 30 min. Non-Operating: 5 – 500Hz, 2.46gRMS (0.0122 g ² /Hz), 3 axes, 30 min.				
Vibration EN 60068-2-6	Operating Sine, 10 – 500 Hz, 1g, 3 axes, 1 oct/min., 60 min.				
MTBF	Rated Load, 90 °C Top Case, Bellcore	500.000	-	-	Hours
Useful Life	90 °C Top Case.	-	50.000	-	Hours

ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

Phenomenon	Conditions / Notes	Standard	Equipment Performance Class
Conducted and Radiated Emission	Test at 230 V _{AC}	EN55015	
Harmonic Current Emissions		EN61000-3-2	Class C
Voltage Changes, Fluctuation and Flicker		EN61000-3-3	

ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

Phenomenon	Conditions / Notes	Standard	Note
Equipment for general lighting purposes -EMC Immunity Requirements		EN 61547	
ESD (Electrostatic Discharge)		EN 61000-4-2	
Radiated Radio-Frequency electromagnetic field		EN 61000-4-3	
Electric Fast Transient / Burst	2 kV on AC input	EN 61000-4-4	
Surge	Level ±1 kV L-N	EN 61000-4-5	
Conducted disturbances induced by Radio-Frequency fields		EN 61000-4-6	
Voltage Dips, short interruptions and Voltage Variations		EN 61000-4-11	
Non-repetitive damped oscillatory transient, Ring wave	2.5 kV	ANSI C.62.41	Category A

SAFETY AGENCIES APPROVALS

Certification Body	Safety Standards	Category
	UL Recognized ANSI / UL60950-1, CSA C22.2 No.60950-1. Models with output voltages <60 V _{DC} include UL and CSA approval (cURus) as LVLE output. LED Driver suitable for dry and damp location	
	To obtain the "CE Declaration of Conformity" please contact info@enedopower.com	
	IEC/EN 61347-2-13 electronic control gear for LED Modules IEC/EN 62384 DC or AC supplied electronic control gear for LED modules – Performance Requirements	
	Reinforced/double Insulation meets IEC/EN61347-2-13 Class II	

Specifications appearing in ENEDO's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.